
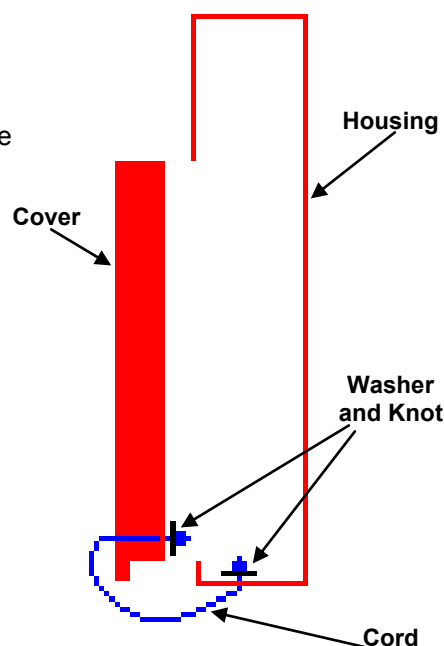


Lifebuoy Housing

Retro fitting of cover

The cover is supplied with a cord, approximately 18" in length, which is secured on the **inside** of the cover with a washer and a knot. A second washer is supplied for use when securing the cord to the lifebuoy housing.

1. On the underside of the housing, adjacent to and forward of the 3" drain hole, drill a $\frac{5}{8}$ " diameter hole. Note: some later housings will already have a suitable $\frac{1}{4}$ " or $\frac{5}{8}$ " hole.
2. Pass the cord through the hole **from the outside** of the housing.
3. **Inside** the housing thread the cord through the second washer and secure with a knot.
4. To ensure that the knot does not undo the cord may be gently melted using a flame from a match or cigarette lighter. Do not apply the flame long enough to weaken the cord and avoid breathing in any fumes.

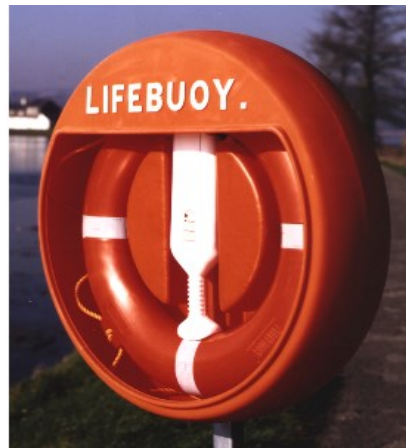

Address:
15 Moor Road
Broadstone
Dorset BH18 8AZ
England

Telephone:
+44 (0)1202 657814

Facsimile:
+44 (0)1202 693005

Email:
info@icbrindle.com

Websites:
.icbrindle.com
.rescueandrecovery.co.uk

